



SteelWall®

Connectors for steel sheet pile walls

2026





MF64 (DTH driving method)



MF64-IC (DTH driving method)

MF130




Larssen	
Corner connectors	4
Omega corner connector	6
T connectors	7
Cross connector	8
Weld-on connectors	9
LPB	
Connectors for high section modulus sheet pile walls	10
Ball + Socket	
MF High-strength connectors	12
MF Connectors for DTH driving method	14
MDF Connectors for high section modulus sheet pile walls	16
MZ Connector System with Tolerance Compensation	17
US Corner connectors	18
US T connectors	19
US Cross connectors	21
Flat sheet	22
Cold-formed	23

Larssen Corner connectors

ULTRA-S

For Larssen sheet piles


Steel grades: S355J2, S72 Grade 50
Steel thickness: 0.35" (9 mm)
Standard lengths: 38.7 ft (11.8 m)
Weight: 17 lbs/ft (25.3 kg/m)
ULTRA-S corner section can be driven individually up to a length of 38.7 ft (11.8 meters), provided that there are no weld joints.



LV20n

For Larssen sheet piles


Steel grades: S355J2, S72 Grade 50
Steel thickness: 0.32" (8 mm)
Standard lengths:
38.7 ft (11.8 m), 44 ft (13.4 m)
Weight: 9.45 lbs/ft (14.07 kg/m)



LLS90

For Larssen sheet piles


Steel grades: S355J2, S72 Grade 50
Steel thickness: 0.35" (9 mm)
Standard lengths:
26.25 ft (8 m), 38.7 ft (11.8 m)
Weight: 11.87 lbs/ft (17.66 kg/m)



LLS135

For Larssen sheet piles

Steel grades: S355J2, S72 Grade 50
Steel thickness: 0.35" (9 mm)
Standard lengths:
26.25 ft (8 m), 38.7 ft (11.8 m)
Weight: 11.87 lbs/ft (17.66 kg/m)




Larssen Corner connectors

LLS170

For Larssen sheet piles

Steel grades: S355J2, S72 Grade 50
Steel thickness: 0.35" (9 mm)
Standard lengths:
26.25 ft (8 m), 38.7 ft (11.8 m)
Weight: 11.85 lbs/ft (17.63 kg/m)




Larssen Omega corner connector

LVOn

For Larssen sheet piles

Steel grades: S355J2, S72 Grade 50
Steel thickness: 0.32" (8 mm)
Standard lengths:
38.7 ft (11.8 m), 44 ft (13.4 m)
Weight: 9.515 lbs/ft (14.16 kg/m)




Larssen T connectors

LTn

For Larssen sheet piles


Steel grades: S355J2, S72 Grade 50
Steel thickness: 0.32" (8 mm)
Standard lengths:
38.7 ft (11.8 m), 45.2 ft (13.8 m)
Weight: 10.42 lbs/ft (15.5 kg/m)



LOTn

For Larssen sheet piles

Steel grades: S355J2, S72 Grade 50
Steel thickness: 0.32" (8 mm)
Standard length S355J2:
38.7 ft (11.8 m), 45.2 ft (13.8 m)
Weight: 11.56 lbs/ft (17.2 kg/m)




Larssen T connectors

LLTS

For Larssen sheet piles

Steel grades: S355J2, S72 Grade 50
Steel thickness: 0.35" (9 mm)
Standard length: 35.4 ft (10.8 m)
Weight: 17.605 lbs/ft (26.2 kg/m)




Larssen Cross connector

L4S

For Larssen sheet piles

Steel grades: S355J2, S72 Grade 50
Steel thickness: 0.32" (8 mm)
Standard length: 38.7 ft (11.8 m)
Weight: 15.6 lbs/ft (23.2 kg/m)




Larssen Weld-on connectors

LV22

For Larssen sheet piles


Steel grades: S355J2, S72 Grade 50
Steel thickness: 0.32" (8 mm)
Standard length: 38.7 ft (11.8 m)
Weight: 5.39 lbs/ft (8.02 kg/m)



L8

For Larssen sheet piles

Steel grades: S355J2, S72 Grade 50
Steel thickness: 0.375" (9.5 mm)
Standard length: 38.7 ft (11.8 m)
Weight: 5.69 lbs/ft (8.47 kg/m)



LPB


Connectors for high section modulus sheet pile walls

LPB100-FU

Compatible with Larssen sheet piles of these manufacturers:

Arcelor Mittal,
NSSMC,
Nucor,
Hoesch,
Anshan-Zizhu,
JFE,
Vitkovice,
Emirates Steel,
Terra Infrastructure


Steel grades: S355J2, S275 Grade 50
Steel thickness: 0.39" (10 mm)
Standard lengths: 38.7 ft (11.8 m) -
Available to order up to 59 ft (18 m)
Weight: 6.592 lbs/ft (9.81 kg/m)

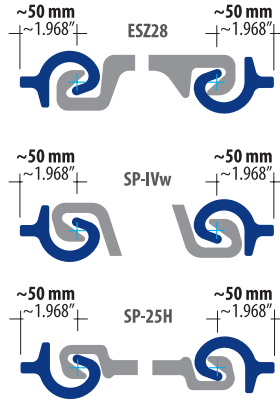

LPB100-10

For Larssen sheet piles


Steel grades: S355J2, S275 Grade 50
Steel thickness: 0.39" (10 mm)
Standard lengths:
26.25 ft (8 m), 38.7 ft (11.8 m)
Weight: 6.652 lbs/ft (9.9 kg/m)



LPB180-10

For Larssen sheet piles


Steel grades: S355J2, S275 Grade 50
Steel thickness: 0.39" (10 mm)
Standard lengths:
26.25 ft (8 m), 38.7 ft (11.8 m)
Weight: 8.628 lbs/ft (12.84 kg/m)

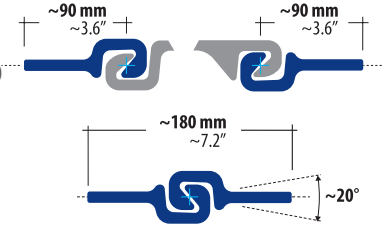

LPB180-12

Not compatible with Larssen sheet piles


Steel grades: S355J2, S275 Grade 50
Steel thickness: 0.47" (12 mm)
Standard lengths: 26.25 ft (8 m), 38.7 ft (11.8 m)
Weight: 9.74 lbs/ft (14.5 kg/m)
Max. tensile strength: 8.58 kips/in (1,502 kN/m)



LPB180-16

Not compatible with Larssen sheet piles

Steel grades: S355J2, S275 Grade 50
Steel thickness: 0.63" (16 mm)
Standard lengths:
26.25 ft (8 m), 38.7 ft (11.8 m)
Weight: 15.05 lbs/ft (22.4 kg/m)



Pipe pile walls

Pipe pile combi walls

H-pile combi walls


SteelWall® 11

MF

High-strength connectors for pipe pile, H-pile and combi walls (Ball + Socket)


MF63

Steel grades: S355J2, S275 Grade 50
 Steel thickness: 0.47" (12 mm)
 Standard lengths: 26.25 ft (8 m), 38.7 ft (11.8 m)
 Weight M35: 3.2 lbs/ft (4.76 kg/m)
 Weight F28: 7.19 lbs/ft (10.7 kg/m)
 Max. tensile strength:
 14.57 kips/in (2,552 kN/m), (FEM)




MF75

Steel grades: S355J2, S275 Grade 50
 Steel thickness: 0.47" (12 mm)
 Standard lengths: 26.25 ft (8 m), 38.7 ft (11.8 m)
 Weight M35: 3.2 lbs/ft (4.76 kg/m)
 Weight F40: 9.6 lbs/ft (14.28 kg/m)
 Max. tensile strength:
 19.52 kips/in (3,419 kN/m)




MF100

Steel grades: S355J2, S275 Grade 50
 Steel thickness: 0.47" (12 mm)
 Standard lengths: 26.25 ft (8 m), 38.7 ft (11.8 m)
 Weight M60: 4.64 lbs/ft (6.9 kg/m)
 Weight F40: 9.6 lbs/ft (14.28 kg/m)
 Max. tensile strength:
 19.52 kips/in (3,419 kN/m)




MF130

Steel grades: S355J2, S275 Grade 50
 Steel thickness: 0.47" (12 mm)
 Standard lengths: 26.25 ft (8 m), 38.7 ft (11.8 m)
 Weight M90: 6.56 lbs/ft (9.76 kg/m)
 Weight F40: 9.6 lbs/ft (14.28 kg/m)
 Max. tensile strength:
 19.52 kips/in (3,419 kN/m)




MF180a

Steel grades: S355J2, S275 Grade 50
 Steel thickness: 0.47" (12 mm)
 Standard lengths:
 26.25 ft (8 m), 38.7 ft (11.8 m)
 Weight M140: 9.92 lbs/ft (14.77 kg/m)
 Weight F40: 9.6 lbs/ft (14.28 kg/m)
 Max. tensile strength:
 19.52 kips/in (3,419 kN/m)




MF180b

Steel grades: S355J2, S275 Grade 50
 Steel thickness: 0.47" (12 mm)
 Standard lengths:
 26.25 ft (8 m), 38.7 ft (11.8 m)
 Weight M90: 6.56 lbs/ft (9.76 kg/m)
 Weight F90: 12.377 lbs/ft (18.42 kg/m)
 Max. tensile strength:
 17.88 kips/in (3,132 kN/m) FEM




MF230

Steel grades: S355J2, S275 Grade 50
 Steel thickness: 0.47" (12 mm)
 Standard lengths:
 26.25 ft (8 m), 38.7 ft (11.8 m)
 Weight M140: 9.92 lbs/ft (14.77 kg/m)
 Weight F90: 12.377 lbs/ft (18.42 kg/m)
 Max. tensile strength:
 17.88 kips/in (3,132 kN/m) FEM



MF250

Steel grades: S355J2, S275 Grade 50
 Steel thickness: 0.47" (12 mm)
 Standard lengths:
 26.25 ft (8 m), 38.7 ft (11.8 m)
 Weight M160: 11.15 lbs/ft (16.6 kg/m)
 Weight F90: 12.377 lbs/ft (18.42 kg/m)
 Max. tensile strength:
 17.88 kips/in (3,132 kN/m) FEM

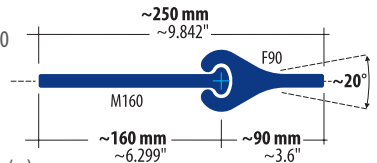

000 Pipe pile walls
 000 Pipe pile combi walls


III H-pile walls
 I H-pile combi walls

MF High-strength connectors for DTH driving method

MF64

Exclusively for DTH driving method


Steel grades: S355J2, S72 Grade 50
Steel thickness: 0.47" (12 mm)
Standard lengths: 26.25 ft (8 m), 38.7 ft (11.8 m)
Weight M22: 2.3 lbs/ft (3.42 kg/m)
Weight F40: 9.6 lbs/ft (14.28 kg/m)
Max. tensile strength: 19.52 kips/in (3,419 kN/m)



MF64-IC

Exclusively for DTH driving method

Steel grades: S355J2, S72 Grade 50
Steel thickness: 0.39 - 0.47" (10 - 12 mm)
Standard lengths: 26.25 ft (8 m), 38.7 ft (11.8 m)
Weight M22: 2.3 lbs/ft (3.42 kg/m)
Weight F40-IC: 9.1 lbs/ft (13.55 kg/m)
Max. tensile strength: 18.07 kips/in (3,164 kN/m)



MDF

Connectors for high section modulus sheet pile walls

MDF100

Steel grades:

S355J2, 572 Gr. 50 (M35),

S430GP, Gr. 60 (DF)

Steel thickness: 0.47" (12 mm)


Standard lengths:

26.25 ft (8 m), 38.7 ft (11.8 m)

Weight M35: 3.2 lbs/ft (4.76 kg/m)

Weight DF: 9.82 lbs/ft (14.62 kg/m)

Max. tensile strength: 18.3 kips/in (3,271 kN/m) FEM



MDF150

Steel grades:

S355J2, 572 Gr. 50 (M60),

S430GP, Gr. 60 (DF)

Steel thickness: 0.47" (12 mm)


Standard lengths:

26.25 ft (8 m), 38.7 ft (11.8 m)

Weight M60: 4.64 lbs/ft (6.9 kg/m)

Weight DF: 9.82 lbs/ft (14.62 kg/m)

Max. tensile strength: 18.3 kips/in (3,271 kN/m) FEM



MDF210

Steel grades:

S355J2, 572 Gr. 50 (M90),

S430GP, Gr. 60 (DF)

Steel thickness: 0.47" (12 mm)


Standard lengths:

26.25 ft (8 m), 38.7 ft (11.8 m)

Weight M90: 6.56 lbs/ft (9.76 kg/m)

Weight DF: 9.82 lbs/ft (14.62 kg/m)

Max. tensile strength: 18.3 kips/in (3,271 kN/m) FEM

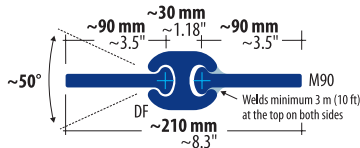

MDF310

Steel grades:

S355J2, 572 Gr. 50 (M140),

S430GP, Gr. 60 (DF)

Steel thickness: 0.47" (12 mm)


Standard lengths:

26.25 ft (8 m), 38.7 ft (11.8 m)

Weight M140: 9.92 lbs/ft (14.77 kg/m)

Weight DF: 9.82 lbs/ft (14.62 kg/m)

Max. tensile strength: 18.3 kips/in (3,271 kN/m) FEM

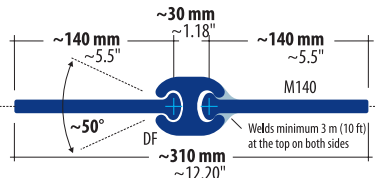

MDF350


Steel grades: S355J2, 572 Gr. 50 (M160), S430GP, Gr. 60 (DF)

Steel thickness: 0.47" (12 mm)

Standard lengths: 26.25 ft (8 m), 38.7 ft (11.8 m)

Weight M160: 11.15 lbs/ft (16.6 kg/m), Weight DF: 9.82 lbs/ft (14.62 kg/m)

Max. tensile strength: 18.3 kips/in (3,271 kN/m) FEM

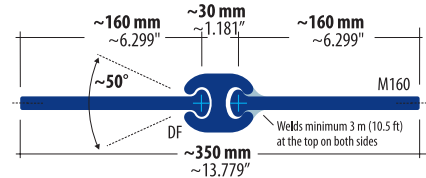

MZ

Connector System with Tolerance Compensation

MZ510

Steel grades: S355J2, 572 Gr. 50 (MZ200 and F40), S430GP, Gr. 60 (DF)

Steel thickness: 0.47" (12 mm)

Standard lengths: 26.25 ft (8 m), 38.7 ft (11.8 m)


Weight MZ200: 17.652 lbs/ft (26.27 kg/m)

Weight DF: 9.82 lbs/ft (14.62 kg/m),

max. tensile strength: 18.295 kips/in (3,271 kN/m) FEM

Weight F40: 9.6 lbs/ft (14.28 kg/m),

max. tensile strength: 19.52 kips/in (3,419 kN/m)

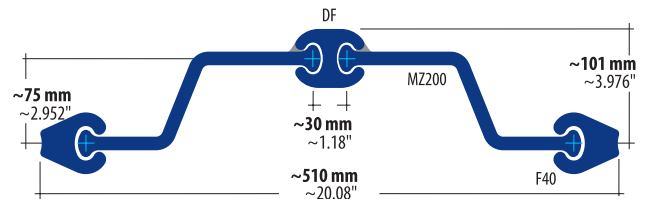

Pipe pile walls

Pipe pile combi walls

H-pile walls


H-pile combi walls

SteelWall® 17

Ball + Socket **Corner connectors**


MFU200

Steel grades: S355J2, S72 Grade 50
 Steel thickness: 0.35" (9 mm)
 Standard lengths: 26.25 ft (8 m), 38.7 ft (11.8 m)
 Weight: 15.92 lbs/ft (23.7 kg/m)
 Wy max (each sheet pile): 2.685 inch³ (44 cm³)

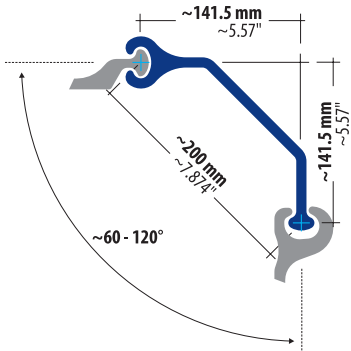


US-90

Steel grades: S355J2, S72 Grade 50
 Steel thickness: 0.32" (8 mm)
 Standard lengths on request, variable from 25 to 35 ft (7.6 m - 10.6 m)
 Weight: 6.85 lbs/ft (10.1 kg/m)



US-135


Steel grades: S355J2, S72 Grade 50
 Steel thickness: 0.32" (8 mm)
 Standard lengths on request, variable from 25 to 35 ft (7.6 m - 10.6 m)
 Weight: 6.92 lbs/ft (10.3 kg/m)



Ball + Socket **T connectors**

US-TS


Steel grades: S355J2, S72 Grade 50
 Steel thickness: 0.32" (8 mm)
 Standard lengths on request, variable from 25 to 35 ft (7.6 m - 10.6 m)
 Weight: 11.1 lbs/ft (16.5 kg/m)



Ball + Socket T connectors


US-T

Steel grades: S355J2, S275 Grade 50
 Steel thickness: 0.32" (8 mm)
 Standard lengths on request,
 variable from
 25 to 35 ft (7.6 m - 10.6 m)
 Weight: 9 lbs/ft (13.4 kg/m)



US-Universal


Steel grades: S355J2, S275 Grade 50
 Steel thickness: 0.32" (8 mm)
 Standard lengths on request,
 variable from
 25 to 35 ft (7.6 m - 10.6 m)
 Weight: 8.33 lbs/ft (12.4 kg/m)



Ball + Socket Cross connectors


US-Cross I

Steel grades: S355J2, S275 Grade 50
 Steel thickness: 0.32" (8 mm)
 Standard lengths on request,
 variable from
 25 to 35 ft (7.6 m - 10.6 m)
 Weight: 13.4 lbs/ft (20 kg/m)



US-Cross II


Steel grades: S355J2, S275 Grade 50
 Steel thickness: 0.32" (8 mm)
 Standard lengths on request,
 variable from
 25 to 35 ft (7.6 m - 10.6 m)
 Weight: 13.4 lbs/ft (20 kg/m)



Flat sheet pile connectors For PS and YSP straight web piles only


FSC60 Center, FSC Leg

Steel grades: S355J2, S275 Grade 50
Steel thickness FSC60 Center: 0.63" (16 mm)
Steel thickness FSC Leg: 0.5" (12.7 mm)
Length FSC60 Center: 31.2 ft (9.5 m)
Length FSC Leg: up to 59 ft (18 m)
Weight FSC60 Center:
20.5 lbs/ft (30.5 kg/m)
Weight FSC Leg: 13.1 lbs/ft (19.5 kg/m)
Max. tensile strength FSC60 Center:
32 kips/in (5,604 kN/m) FEM




FSC90 Center, FSC Leg

Steel grades: S355J2, S275 Grade 50
Steel thickness FSC90 Center: 0.63" (16 mm)
Steel thickness FSC Leg: 0.5" (12.7 mm)
Length FSC90 Center: 32.8 ft (10 m)
Length FSC Leg: up to 59 ft (18 m)
Weight FSC90 Center:
19.62 lbs/ft (29.2 kg/m)
Weight FSC Leg: 13.1 lbs/ft (19.5 kg/m)
Max. tensile strength FSC90 Center:
35 kips/in (6,129 kN/m) FEM



FSC120 Center, FSC Leg

Steel grades: S355J2, S275 Grade 50
Steel thickness FSC120 Center: 0.63" (16 mm)
Steel thickness FSC Leg: 0.5" (12.7 mm)
Length FSC120 Center: 36.8 ft (11.2 m)
Length FSC Leg: up to 59 ft (18 m)
Weight FSC120 Center:
17.67 lbs/ft (26.3 kg/m)
Weight FSC Leg: 13.1 lbs/ft (19.5 kg/m)
Max. tensile strength FSC120 Center:
36 kips/in (6,129 kN/m) FEM




Cold-formed Corner and weld-on connectors

CF90

Corner connector for midsize
cold-formed sheet piles


Steel grades: S355J2, S275 Grade 50
Steel thickness: 0.32" (8 mm)
Standard length: 44.1 ft (13.45 m)
Weight: 11.76 lbs/ft (17.5 kg/m)



CF-Junction

Weld-on connector for midsize
cold-formed sheet piles

Steel grades: S355J2, S275 Grade 50
Steel thickness: 0.32" (8 mm)
Standard length: 38.7 ft (11.8 m)
Weight: 6 lbs/ft (8.87 kg/m)



SteelWall®

Connectors for steel sheet pile walls



SteelWall ISH GmbH
Tölzer Str. 32
82031 Grünwald
Germany

US sales line 8:30 am to 4:30 pm
(US Central Time)
Toll free 1(888) 309 2250
Fax: 1(888) 743 7712
E-Mail: chang@steelwallus.com

Copyrighted
property of
SteelWall ISH
GmbH. All rights
reserved.

Please find more information by visiting:
www.steelwallus.com

Dec 2nd, 2025